

PACO
a brand of LMP



VR4M



VEKTOR MEDICAL

Sealed Architectural Linear Solutions



VT4M



DESCRIPTION

The **Vektor Medical Series** offers an optimal architectural solution for healthcare applications requiring sealed and NSF certified washable luminaires limiting the potential accumulation and or spread of microbes. Moreover, its innovative design not only enhances visual appeal but also prioritizes easy maintenance.

This feature not only prevents dust accumulation but also enhances the fixtures' resilience against dirt and water. Consequently, the IP65 is suitable for deployment in critical care environments within healthcare facilities.

PERFORMANCE

- High efficiency snap-in smooth acrylic lens.
- High efficiency luminaire (up to 1,000 lumens / foot)


FEATURES

- Aluminum 4 inch-wide linear fixture with unique fabrication concept made for continuous runs with simple and user-friendly joining systems.
- Cast aluminium end caps.
- 80 CRI, 90 CRI and COI Compliant LED Option.
- Standard IP65.
- Mounting options: T-Bar and Recessed Flange.
- Antimicrobial matte finish optional.
- Special LED modules and optics providing a clean, glare-free illumination.

LISTINGS




Exploded View

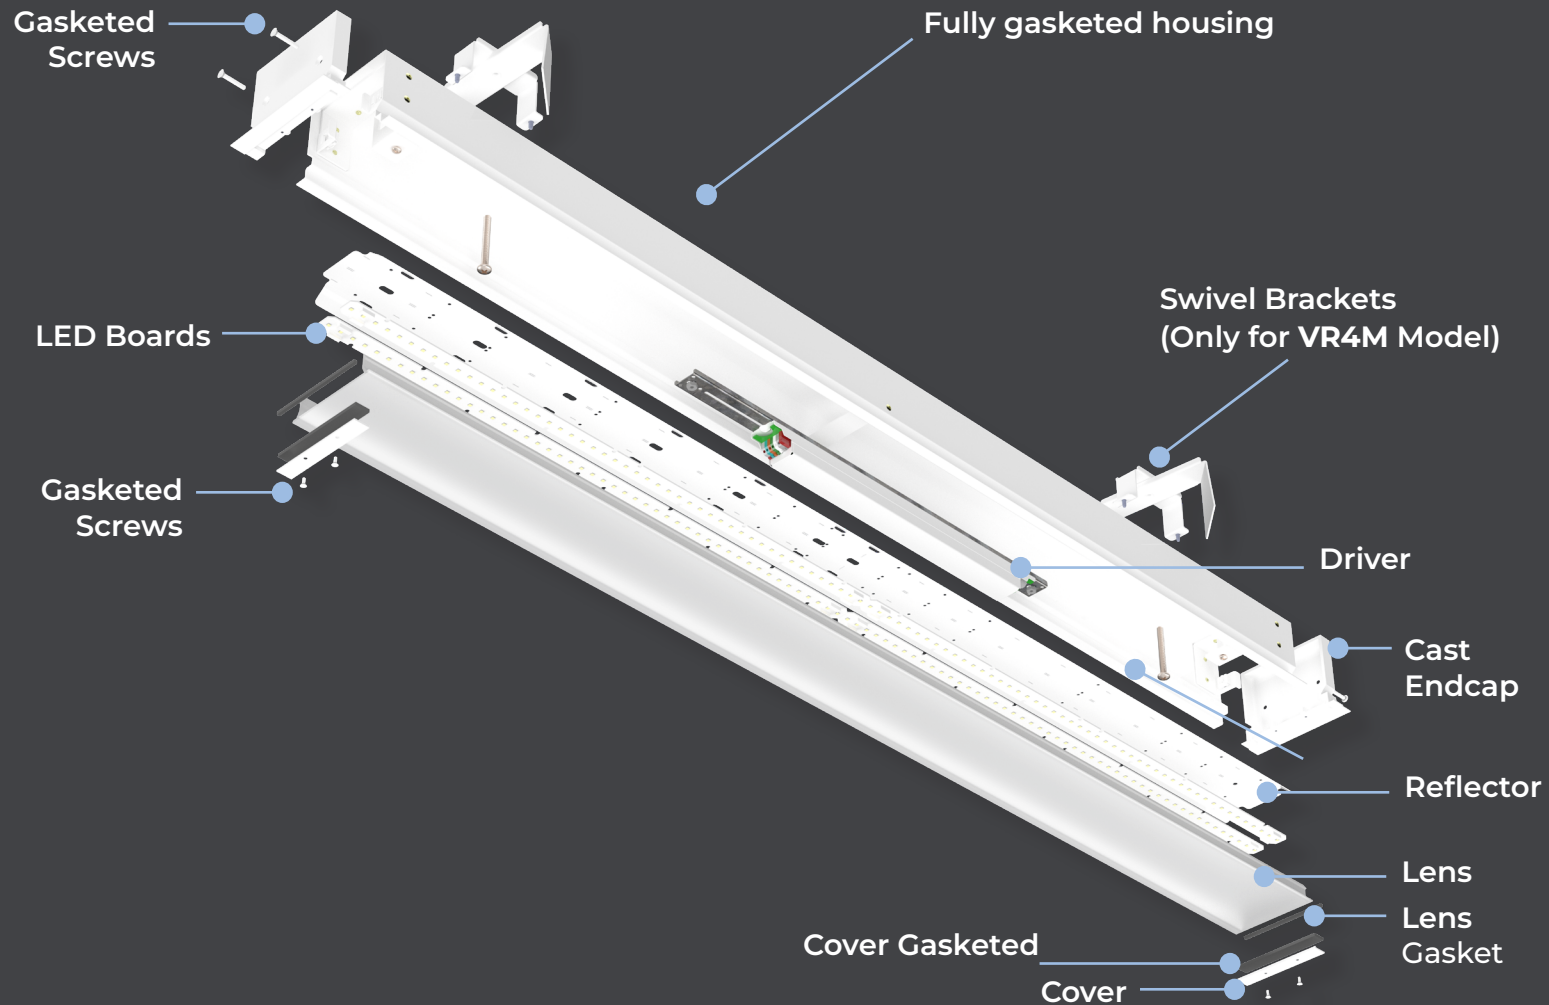


Recessed Flange, Linear System

The **VR4M Recessed** is a linear system of LED luminaires that can be integrated into most ceiling types to provide a discreet, flexible general lighting solution for healthcare and institutional environments.

These luminaires deliver up to 1000 Lumens Per Foot. Available in 2F, 4F, 6F or 8F, and continuous runs.

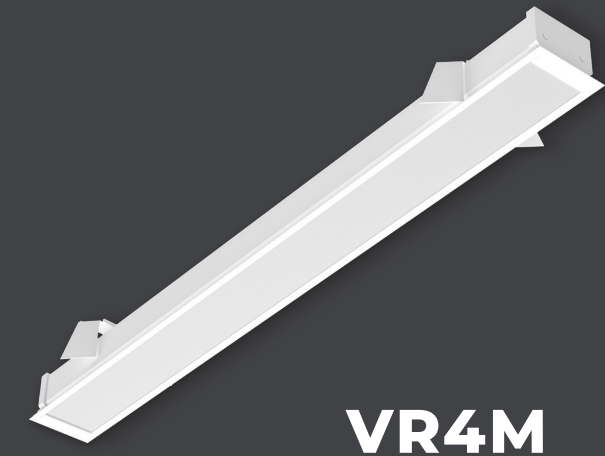

Mounting Flexibility

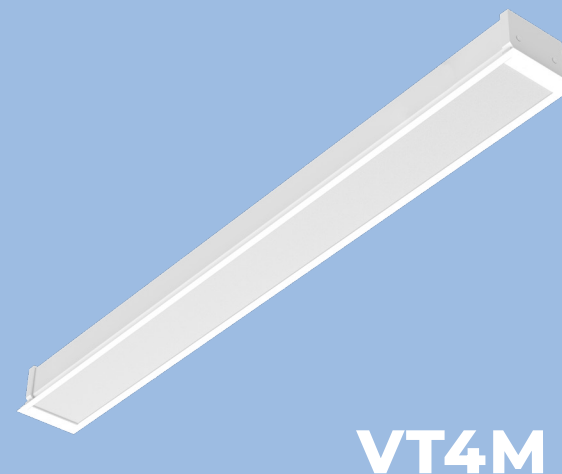

Recessed, Linear System for T-Bar Ceilings


Introducing the **VT4M Recessed T-Bar**, an innovative linear LED luminaire designed to integrate into various standard grid ceiling types. Tailored to meet the diverse lighting needs of healthcare and institutional environments, including patient rooms, laboratories, food processing areas, corridors, and retail spaces, the Vektor Medical Recessed T-Bar offers a versatile and efficient general lighting solution.

Versatility

Mounting Options

- T-Bar / Grid
- Recessed Flange

Color temperatures

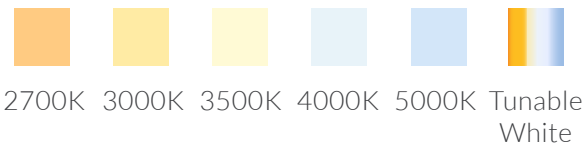

Nominal Length Options

2F:

4F:

6F:

8F:

XF: Continuous Runs

Color rendering options

- 80 +
- 90 +
- COI Compliant

Control Options

- **ND** | Non-dimming applications
- **D** | 0-10V dimming
- **D1** | 0-10V dimming to 1%
- **DA** | DALI

Finish option

- Anti-Microbial Matte White





LOCAL / GLOBAL
PACO LIGHTING

Follow Us:



LinkedIn



Facebook



Instagram



info@pacolighting.com | www.pacolighting.com